

LIMITED WARRANTY - NOTICE-READ CAREFULLY
CONDITIONS OF SALE -
CFT and NOX-CRETE offer this product for sale subject to, and Buyer and all users are deemed to have accepted, the following conditions of sale and limited warranty which may only be varied by written agreement of a duly authorized corporate officer of NOX-CRETE. No other representative of or for NOX-CRETE is authorized to grant any warranty or to waive limitation of liability set forth below. | **WARRANTY LIMITATION -** NOX-CRETE warrants this product to be free of manufacturing defects. If the product when purchased was defective and was within use period indicated on container or carton, when used, NOX-CRETE will replace the defective product with new product without charge to the purchaser. | CFT and NOX-CRETE make NO OTHER WARRANTY, either express or implied, concerning this product. There is NO WARRANTY OF MERCHANTABILITY. In no case shall CFT or NOX-CRETE be liable for special, indirect or consequential damages resulting from the use or handling of the product and no claim of any kind shall be greater in amount than the purchase price of the product in respect of which damages are claimed. | **INHERENT RISKS -** CFT AND NOX-CRETE MAKE NO WARRANTY TO THE PERFORMANCE OF THE PRODUCT AFTER IT IS APPLIED BY THE PURCHASER, AND PURCHASER ASSUMES ALL RISKS ASSOCIATED WITH THE USE OR APPLICATION OF THE PRODUCT.

Repairs Minor Surface Defects on Cast Concrete Surfaces

cft™ Column Fix

RESURFACING/FINISHING COMPOUND

Specially Formulated to Repair Minor Surface Defects on CFT Column Cast™ Concrete Surfaces

- | **Repairs Air Voids (Bugholes), Spalls, Honeycombs, Gouges, Chips And Scratches On Most Cast Concrete Surfaces**
- | **Combines Unique Blend Of Portland Cement, Acrylic Polymer Modifiers And Ultra-Fine Aggregates**
- | **Exceptional Bond To Concrete And Masonry**
- | **Fast Drying - In As Little As 15 Minutes**
- | **Easily Featheredged For Smooth Transitions**
- | **Smooth, Creamy Consistency (Contains No Coarse Grit)**
- | **Contains No Gypsum**
- | **Color Blended To Match Concrete**
- | **Self-Curing In Most Applications**
- | **Easy To Use, Single Component Formulation**

cft™ column form
technology inc

11070 Fleetwood St. 'F' | Sun Valley, CA 91352 USA
www.cftech.us | PH (866) 821-2278 | FX (818) 504-0433 | info@cftech.us

LOT #
USE BY

NET WEIGHT
12 LBS (5.5 KG)

READ BEFORE USE -
Request current product literature, labels and material safety data sheets from manufacturer and read thoroughly before product use or visit www.cftech.us for downloadable version. | Application instructions for this product are located on the product label and should be read thoroughly before use. | Site environmental conditions, substrate conditions and construction have a major effect on product selection, application procedures and rates, appearance and performance. Product literature provides general information applicable to some conditions. However, a full scale site test application by the purchaser or installer before field scale use is mandatory (irrespective of any other verbal or written representations) to verify that product and quantities purchased can be satisfactorily applied and will achieve desired appearance and performance under intended use conditions. | **SHELF LIFE -** Shelf life is one year. Use before the "USE BY" date stated on product label. | **HANDLING & STORAGE -** Store in a dry location in a temperature range between 40° F (4° C) and 100° F (38° C).



Engineered
Exclusively
for **cft** by

n


...to solve problems

WARNING! THIS PRODUCT CONTAINS HYDRAULIC CEMENT AND LIME. WHEN MIXED FOR USE, CONTENTS ARE HIGHLY ALKALINE. CONTACT WITH PRODUCT MAY CAUSE SKIN AND EYE IRRITATION AND/OR BURNS. AVOID INHALATION OF DUST AS IT IS KNOWN TO CAUSE CANCER OR DELAYED LUNG INJURY.

Protect skin and eyes. Wear eye protection, gloves, boots and protective clothing to avoid contact. Not intended for internal use. **Protect respiration.** Wear approved respirator. Avoid inhalation of silica dust which is known to cause lung cancer or delayed lung injury, including silicosis. Handle product in a manner to minimize dust creation.

WARNING: THE DUST FROM THIS PRODUCT CONTAINS A CHEMICAL WHICH THE STATE OF CALIFORNIA RECOGNIZES AS CAUSING CANCER.

Accidental ingestion. Seek immediate medical attention. Drink 8 - 16 oz of water to dilute. Do not induce vomiting unless instructed to do so by medical personnel. **Skin or eye contact.** Flush contacted area with clean water immediately and for 10 - 15 minutes following contact. Seek immediate medical attention. Contaminated clothing should be thoroughly washed before wearing. **KEEP THIS AND ALL HAZARDOUS MATERIALS OUT OF THE REACH OF CHILDREN.**

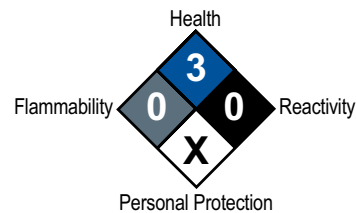

FOR MSDS: Column Form Technology (866) 821-2278 | www.cfttech.us
or Nox-Crete (800) 669-2738 | www.nox-crete.com

FOR EMERGENCY MEDICAL INFORMATION: Chemtrec USA (800) 424-9300
OUTSIDE USA (703) 527-3877